

LOCC-BOX MINI 1-8 A

716480

Elektronisk sikring 24 V DC/1-8 A Alarm ved fejl

- Inkluderet minus forbindelse
- Justerbar strøm 1-8 A
- Løser pålideligt 12/24 V DC-kredsløb
- Valgbar karakteristik
- Tilpasset til trang plads i tavlen











PRODUKTBESKRIVELSE



SPECIFIKATIONER

| | |
|---------------------------------------|---|
| Bredde | 8,1 mm |
| Dybde | 92 mm |
| EMC | EN61000-6-2, EN61000-6-4 |
| Godkendelser | CE |
| Højde | 87 mm |
| Indgangsstrøm max | 8 A |
| IP-klasse | IP20 |
| Justerbar strømområde max | 8 A |
| Justerbar strømområde min. | 1 A |
| Justerbare trin | 1 A |
| Kapacitans max | 10000 µF |
| Montering | DIN-skinne |
| Reaktionstid | 800 ms |
| Spændingsfald over halvlederen | 180 mV |
| Statusindikering | Lysdiode. Konstant grøn: OK; Blinkende Orange: 90 % last; Blinkende rød: Udløst sikring |

| | |
|---------------------------|---------------------------------|
| Styrespænding DC max | 30 V |
| Styrespænding DC min | 10 V |
| Temperaturområde fra | -25 °C |
| Temperaturområde til | 50 °C |
| Tilslutning | Fjeder 0,25-2,5 mm ² |
| Tilslutningstværsnit maks | 2,5 mm ² |
| Tilslutningstværsnit min | 0,25 mm ² |
| Udgangshalvledere | MOSFET |
| Udgangsstrøm max | 8 A |
| Vægt | 60 g |

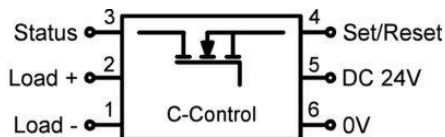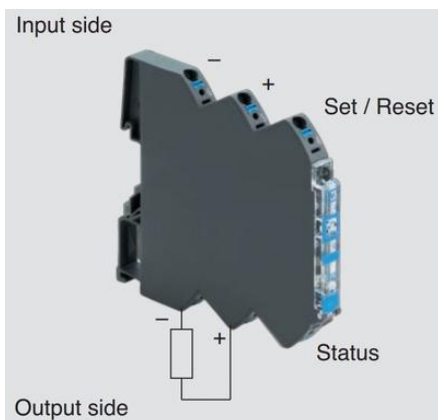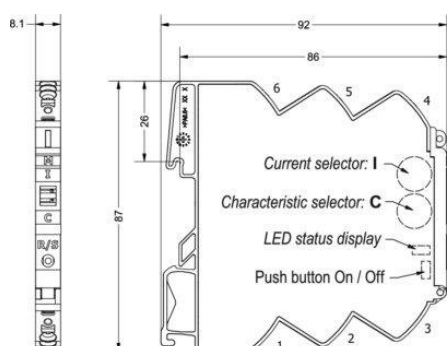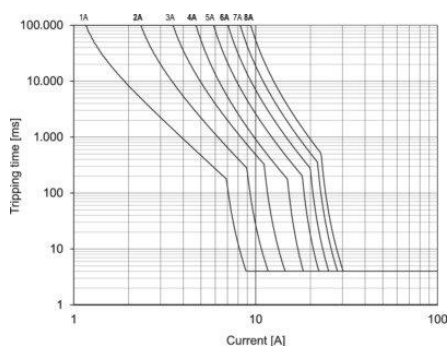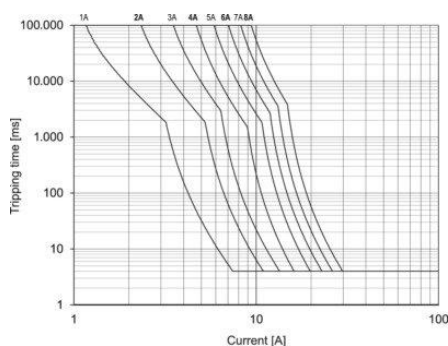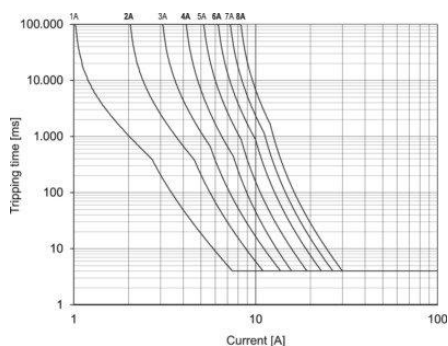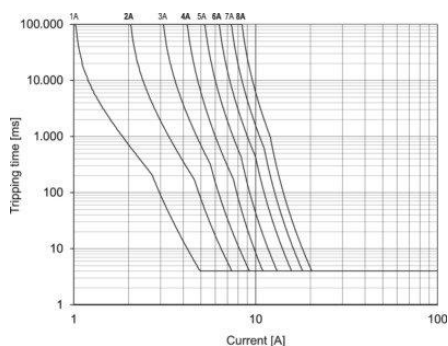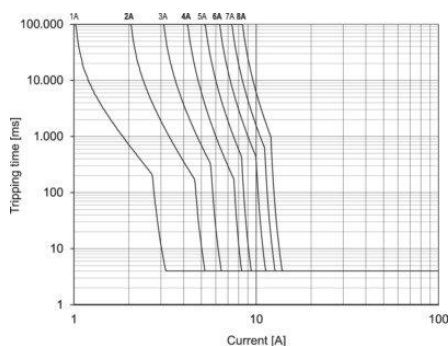

- 1: Load -
- 2: Load +
- 3: Status output
- 4: Set/Reset
- 5: DC +24V
- 6: 0V

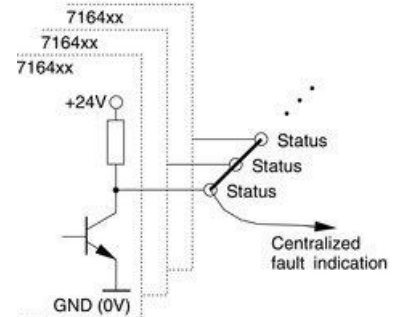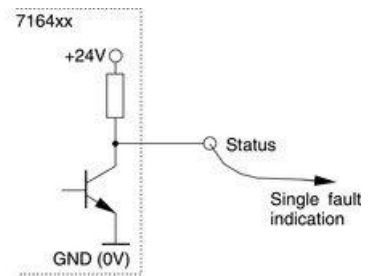

LED Status, Button, Rotary Switch

| | | |
|---------------------------------------|----------|--|
| LED green | ON | Function is OK* |
| LED green, flashing 1 Hz | Overload | Load above 90 % of 1 nominal |
| LED green, flashing 5 Hz | Overload | Load above 100 % of 1 nominal |
| LED red | OFF | Module switched off or acknowledged* |
| LED red, flashing 1 Hz | Overload | Output off due to overload/short circuit** |
| LED red, flashing 5 Hz | Error | Wiring error - feedback (internal error) |
| LED red, flashing shortly | OFF | Output off via remote set/reset |
| LED red/green, flashing 1 Hz | ON | Target settings via rotary switch deviate from actual settings. NOTICE: Switching off and on via pushbutton required. |
| Button *** | ON/OFF | Nominal operation: ON/OFF Load monitoring tripped: 1st push: acknowledge 2nd push: ON |
| Rotary Switch (I) - Switch Position** | | Rated current, see page 4. |
| Rotary Switch (C) - Switch Position** | | Characteristic: 1: fast 2: middle 3: slow-1 4: slow-2 5: slow-3 |

* If the operating voltage is switched off, the last status is saved (Default).
 ** Accept the setting - after switching on again via the button, not by Remote Set/Reset
 *** Master function - switch off via push button, can only be switched on again via push button

For further information see also the operating instructions