



PTFE-SLANGE, GLAT, SS-FLETNING (SAE 100R14)

Serie Speed-Flow, -R14



TR14003
Speed-Flow-R14, 1/8"


- Dimensioner 1/8" til 1 1/8"
- Rustfrit stålflet for mekanisk beskyttelse
- I henhold til standard SAE 100R14

PRODUKTBEKRIVELSE

SPECIFIKATIONER

Diameter indre	3 mm
Diameter ydre	6 mm
Max arbejdstryk	105 bar
Sprængtryk	827 bar
Temperaturområde	-70°C +260°C

TR14

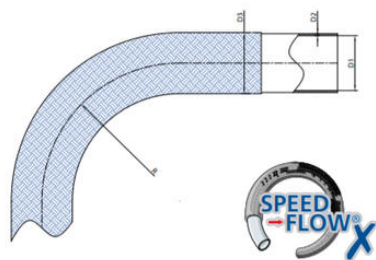

Size inch	Dash	D1		D2		D3		R	WP	BP	Weight	REF
		min	max	min	max	min	max	mm	Bar/20°C	Bar	g/m	VRGR#
1/8"	3	3.3	3.8	0.90	5.3	6.8	40	105	827	65	TR14003	
3/16"	4	4.4	5.2	0.90	7.1	8.2	60	105	589	92	TR14006	
1/4"	5	6	6.9	0.75	8.9	10.1	75	105	620	94	TR14006	
5/16"	6	7.5	8.4	0.65	10.41	11.8	100	105	552	141	TR14008	
3/8"	7	8.1	10	0.65	12.2	13.4	125	105	483	148	TR14009	
1/2"	8	8.9	10.8	0.90	12.9	14.3	135	70	414	148	TR14010	
1/2"	10	12.3	13.3	0.90	15.3	16.8	165	56	414	249	TR14012	
5/8"	12	15.3	16.5	0.90	18.6	20.10	200	56	345	290	TR14016	
3/4"	14	18.4	19.6	1.00	21.3	23.3	230	56	276	339	TR14019	
7/8"	16	21.4	23	1.00	24.6	26.9	250	56	241	382	TR14022	
1"	18	24.6	26.2	1.20	27.8	29.8	300	56	241	461	TR14025	
1 1/8"	20	27.8	29.4	1.2	31.9	33.5	410	42	172	520	TR14028	