

HØJT FLOW, HØJT TRYK, DOME LOADED, DIAPHRAGM SENSOR



26-1100 serien Trykreducerede Regulator

26-1100
26-1100 serien

- Max indgangstryk: 690 bar
- Max udgangstryk: 690 bar
- Temperaturområde: -40 til 74°C
- CV: 0.46, 1.30
- Bubble-tight



PRODUKTBESKRIVELSE

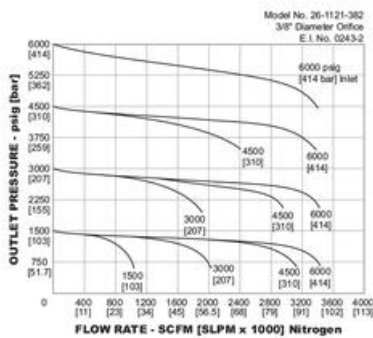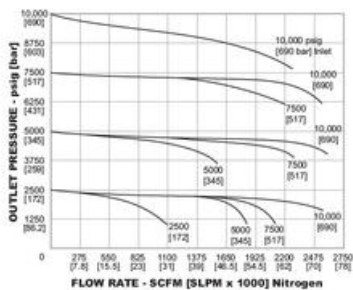

Example for selecting a part number:

26-11	2	1	3	8	1	
BASE SERIES	BODY MATERIAL	LOADING METHOD	INLET AND OUTLET PORT TYPE	DIAPHRAGM PORT SIZE	INNER VALVE SIZE	
26-11	1 - Brass 2 - 304 Stainless Steel 3 - Aluminum 2024-T351 4 - 316 Stainless Steel	1 - Internally loaded	1 - SA 2 - NPT 3 - MS23449	1/4" MS23449 1/4" NPT 1/4" MS23449	4 - 20" # - 1/2"	1 - 5.27 Orifice 2 - 6.27 Orifice

