

## REDUKTIONSFLANGE - PTFE LINED

LMP Flourcarbon - korrosions resistent

REDFDN25/15D  
PTFE Coated Reduktionsflange DN25/15 DIN




- Flange: Stål R-St 37-2
- Coating: Ren PTFE
- Temperaturområde: -200 til +260°C
- DIN standard
- Findes også ANSI standard



### PRODUKTBESKRIVELSE

### SPECIFIKATIONER


<b>DN1/DN2</b>	25,15 mm
<b>Type</b>	A
<b>D</b>	115 mm
<b>K1</b>	85 mm
<b>N x D5</b>	4xm12
<b>N x d3</b>	4xm12
<b>L</b>	35 mm
<b>D2</b>	58 mm
<b>D1</b>	68 mm

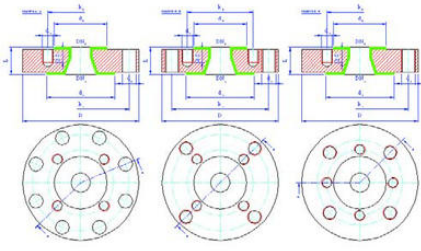

Type A

Type B

Type C

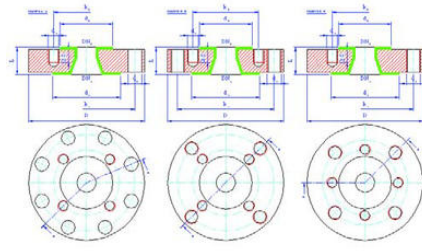

Type A

Type B

Type C