


KUGLEHANE - BVA23 - RUSTFRI

Kugleventil

BVA23FF100SST
Ball valve DN100 flanged 1.4408 PTFE

- 2/2 vejs Rustfri kugleventil
- Fuldboret
- Montering med flanger, svejseender og gevind
- Langt håndtag

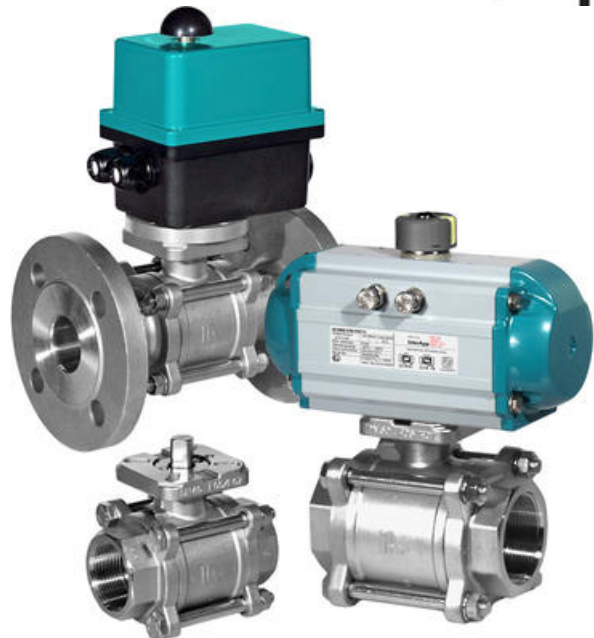

PRODUKTBESKRIVELSE

Kugleventil i rustfrit stål med 3-delt krop, fuld boring, topflange til montering af aktuator. Kan anvendes til afspærring af vand, andre væsker, gasser og damp.

MED MULIGHED FOR:

- Montering af pneumatisk eller elektrisk aktuator
- Monteringsmulighed med gevind, flanger og svejseender




SPECIFIKATIONER

Dimension	100 DN
Kv ved 90°	1414 m³/h
Materiale pakning	PTFE
Montering	DIN 3202-F1
Topflange	ISO 5211
Vægt	34,9 kg
Ventilhus	CF8M (1.4408)


Product features

- Connection (Face to face dimension)
 - BVA23FT threaded ends DIN EN 10226-1 Rp½" - 4" (DIN 3202-M3)
 - BVA23FB butt-weld ends DN10-100 (DIN 3202-S13)
 - BVA23FL butt-weld ends long DN15-100
 - BVA23FF flanged ends PN40 DN15-100 (DIN 3202-F1)
- Max. working pressure 63 bar (BVA23FF 40bar)
- Temperature range -20°C + 160°C. Versions for lower temperatures on request

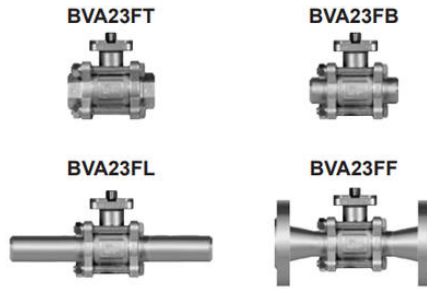

Construction

1	3-piece body	CF8M (1.4408)
2	Seat	AS1 316 (1.4403)
3	Seat ring white (standard)	PTFE + 30% GF
3	Seat ring grey (for steel)	PTFE + 20% Carbon
4	Seat ring	PTFE
5	Wafer	PTFE
6	Stem seal self-adjusting	PTFE
6	with device washer (for approx. 30.000 cycles)	PTFE
7	Stem	AS1 316 (1.4403)
8	Gland nut	AS1 304 (1.4301)
9	Seat ring	Union
10	Gland ring	AS1 304 (1.4301)
11	Bevel washer	Spring steel




BVA23FB



BVA23FB	DN	RF	LF	H	S	ISO	Weight kg
BVA23FB 014 SS1	15	20	40	7	8	F02-04	6,0
BVA23FB 016 SS1	20	25	40	7	8	F02-04	6,0
BVA23FB 018 SS1	25	32	40	7	8	F02-04	6,0
BVA23FB 020 SS1	32	40	44	8	9	F02-04	6,0
BVA23FB 025 SS1	40	50	52	10	11	F04-05	7,0
BVA23FB 030 SS1	50	63	60	11	12	F04-05	10,0
BVA23FB 040 SS1	63	80	72	12	13	F04-05	12,0
BVA23FB 050 SS1	80	100	88	14	15	F04-05	15,0
BVA23FB 060 SS1	100	125	105	16	17	F04-05	20,0
BVA23FB 080 SS1	150	190	160	19	20	F06-07	30,0
BVA23FB 100 SS1	200	250	210	22	23	F08-09	40,0
BVA23FB 125 SS1	250	315	270	25	26	F10-11	50,0
BVA23FB 150 SS1	300	380	330	28	29	F12-13	60,0
BVA23FB 180 SS1	350	450	390	31	32	F14-15	70,0
BVA23FB 200 SS1	400	500	440	34	35	F16-17	80,0
BVA23FB 250 SS1	500	630	560	40	41	F20-21	100,0
BVA23FB 300 SS1	600	760	680	46	47	F24-25	120,0
BVA23FB 400 SS1	800	1000	900	56	57	F30-31	160,0

BVA23FL




BVA23FL	DN	RF	LF	H	S	ISO	Weight kg
BVA23FL 014 SS1	15	20	40	7	8	F02-04	6,0
BVA23FL 016 SS1	20	25	40	7	8	F02-04	6,0
BVA23FL 018 SS1	25	32	40	7	8	F02-04	6,0
BVA23FL 020 SS1	32	40	44	8	9	F02-04	6,0
BVA23FL 025 SS1	40	50	52	10	11	F04-05	7,0
BVA23FL 030 SS1	50	63	60	11	12	F04-05	10,0
BVA23FL 040 SS1	63	80	72	12	13	F04-05	12,0
BVA23FL 050 SS1	80	100	88	14	15	F04-05	15,0
BVA23FL 060 SS1	100	125	105	16	17	F04-05	20,0
BVA23FL 080 SS1	150	190	160	19	20	F06-07	30,0
BVA23FL 100 SS1	200	250	210	22	23	F08-09	40,0
BVA23FL 125 SS1	250	315	270	25	26	F10-11	50,0
BVA23FL 150 SS1	300	380	330	28	29	F12-13	60,0
BVA23FL 180 SS1	350	450	390	31	32	F14-15	70,0
BVA23FL 200 SS1	400	500	440	34	35	F16-17	80,0
BVA23FL 250 SS1	500	630	560	40	41	F20-21	100,0
BVA23FL 300 SS1	600	760	680	46	47	F24-25	120,0
BVA23FL 400 SS1	800	1000	900	56	57	F30-31	160,0

BVA23FT



BVA23FT	DN	RF	LF	H	S	ISO	Weight kg
BVA23FT 014 SS1	15	20	40	7	8	F02-04	6,0
BVA23FT 016 SS1	20	25	40	7	8	F02-04	6,0
BVA23FT 018 SS1	25	32	40	7	8	F02-04	6,0
BVA23FT 020 SS1	32	40	44	8	9	F02-04	6,0
BVA23FT 025 SS1	40	50	52	10	11	F04-05	7,0
BVA23FT 030 SS1	50	63	60	11	12	F04-05	10,0
BVA23FT 040 SS1	63	80	72	12	13	F04-05	12,0
BVA23FT 050 SS1	80	100	88	14	15	F04-05	15,0
BVA23FT 060 SS1	100	125	105	16	17	F04-05	20,0
BVA23FT 080 SS1	150	190	160	19	20	F06-07	30,0
BVA23FT 100 SS1	200	250	210	22	23	F08-09	40,0
BVA23FT 125 SS1	250	315	270	25	26	F10-11	50,0
BVA23FT 150 SS1	300	380	330	28	29	F12-13	60,0
BVA23FT 180 SS1	350	450	390	31	32	F14-15	70,0
BVA23FT 200 SS1	400	500	440	34	35	F16-17	80,0
BVA23FT 250 SS1	500	630	560	40	41	F20-21	100,0
BVA23FT 300 SS1	600	760	680	46	47	F24-25	120,0
BVA23FT 400 SS1	800	1000	900	56	57	F30-31	160,0

BVA23FF



BVA23FF	DN	RF	LF	H	S	ISO	Weight kg
BVA23FF 014 SS1	15	20	40	7	8	F02-04	6,0
BVA23FF 016 SS1	20	25	40	7	8	F02-04	6,0
BVA23FF 018 SS1	25	32	40	7	8	F02-04	6,0
BVA23FF 020 SS1	32	40	44	8	9	F02-04	6,0
BVA23FF 025 SS1	40	50	52	10	11	F04-05	7,0
BVA23FF 030 SS1	50	63	60	11	12	F04-05	10,0
BVA23FF 040 SS1	63	80	72	12	13	F04-05	12,0
BVA23FF 050 SS1	80	100	88	14	15	F04-05	15,0
BVA23FF 060 SS1	100	125	105	16	17	F04-05	20,0
BVA23FF 080 SS1	150	190	160	19	20	F06-07	30,0
BVA23FF 100 SS1	200	250	210	22	23	F08-09	40,0
BVA23FF 125 SS1	250	315	270	25	26	F10-11	50,0
BVA23FF 150 SS1	300	380	330	28	29	F12-13	60,0
BVA23FF 180 SS1	350	450	390	31	32	F14-15	70,0
BVA23FF 200 SS1	400	500	440	34	35	F16-17	80,0
BVA23FF 250 SS1	500	630	560	40	41	F20-21	100,0
BVA23FF 300 SS1	600	760	680	46	47	F24-25	120,0
BVA23FF 400 SS1	800	1000	900	56	57	F30-31	160,0