

EFFEPI RUSTFRI STÅL BUTTERFLYVENTIL TYPE "AL4"

EFFAL425DA

Kemi butterflyventil rustfri stål DN25 double acting

- Materiale: Rustfrit stål AISI 304
- Temperaturområde: 0°C - +150°C
- Pakning: Silicone
- Flere forskellige tilslutninger
- Fås både som double acting og single acting normally open/normally closed



PRODUKTBESKRIVELSE

Rustfri stål butterflyventil med roterende pneumatisk aktuator.

Ventilkrop: Rustfrit stål AISI 304

Disk: Rustfrit stål AISI 304

Pakning: Silicone

Tilslutninger:

GAS ISO 228 hun-hun DIN gevind

GAS ISO 228 han-han DIN gevind

trykluft GAS tilslutning: 1/8"

se teknisk fil.

Temperaturområder:

fra 0°C - +150°C

Aktuator tryk:

5 til 8 bar double acting


6 til 8 bar single acting

DA: 1" - 1.1/4" - 1.1/2" - 2" - 2.1/2" - 3" - 4" (double acting)

SANC: 1" - 1.1/4" - 1.1/2" - 2" - 2.1/2" - 3" (single acting normally closed)

SANO: 1" - 1.1/4" - 1.1/2" - 2" - 2.1/2" - 3" (single acting normally open)

Anodiserende behandlet udvendigt i aluminium

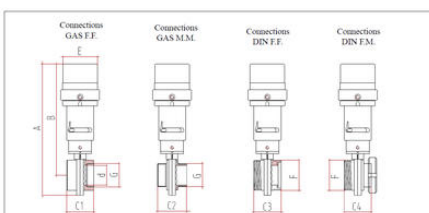

OVERALL DIMENSIONS		DOUBLE ACTING - SINGLE ACTING												
DN	IG	T	ACTUATOR		A	B	C1	C2	C3	C4	d	E	Kv	Weight
mm			Type	mm	mm	mm	mm	mm	mm	mm	mm	mm	m ³ /h	op.
25	1"	52 x 1/8"	DE6302 - SE6302	270	230	65	67	65	72.5	25	77	3	1800	
32	1 1/4"	58 x 1/8"	DE6302 - SE6302	275	232	65	67	65	72.5	32	77	8	2000	
40	1 1/2"	65 x 1/8"	DE6302 - SE6302	283	236	70	70	70	75	38	77	13.5	2400	
50	2"	78 x 1/8"	DE8003 - SE8003	327	274	70	73	70	78	50	100	22	3800	
65	2 1/2"	95 x 1/8"	DE8003 - SE8003	343	285	70	75	76	81	66	100	43	4420	
80	3"	110 x 1/8"	DE8003 - SE8003	363	293	80	80	88	95	80	100	78	5140	
100	4"	130 x 1/4"	DE8003	393	308	90	90	90	97.5	100	100	300	6000	